

Gebrema Handelsonderneming BV

Bevestigingstechniek – Verspaning – Kunststof spuitgietproducten

Postbus 61 - NL-1380 AB - Weesp

Tel 0294 415151 Fax 0294 415020


Bedrijfsinfo: zie www.gebrema-weesp.nl

Mail: sales@gebrema-weesp.nl


Self-locking nylon cable ties

Material: Nylon 66, 94V-2 certificated by UL.
Heat-resisting, erosion control, insulate well and not apt to age.

Color: Natural(or white, standard color), UV black and other colors are available as requested



Item No.	Length		Width mm	Bundie Dia(E) mm	Min Tensile Strength		Pack pcs/polybag
	inch	mm			lbs	kgs	
YOH-WM-2.5X60	2.4	60	2.5	2-11	18	8	100
YOH-WM-2.5X80	3.2	80	2.5	2-16	18	8	100
YOH-WM-2.5X100	4	100	2.5	2-22	18	8	100
YOH-WM-2.5X120	4.7	120	2.5	2-30	18	8	100
YOH-WM-2.5X150	6	150	2.5	2-35	18	8	100
YOH-WM-2.5X160	6.3	160	2.5	2-40	18	8	100
YOH-WM-2.5X200	8	200	2.5	3-50	18	8	100
YOH-WM-3.6X140	5.5	140	3.6	3-33	40	18	100
YOH-WM-3.6X150	6	150	3.6	3-35	40	18	100
YOH-WM-3.6X180	7.1	180	3.6	3-42	40	18	100
YOH-WM-3.6X200	8	200	3.6	3-50	40	18	100
YOH-WM-3.6X250	10	250	3.6	3-65	40	18	100
YOH-WM-3.6X280	11	280	3.6	3-70	40	18	100
YOH-WM-3.6X300	12	300	3.6	3-80	40	18	100
YOH-WM-3.6X370	14.6	370	3.6	3-105	40	18	100
YOH-WM-4.8X120	4.7	120	4.8	3-30	50	22	100
YOH-WM-4.8X160	6.3	160	4.8	3-40	50	22	100
YOH-WM-4.8X180	7.1	180	4.8	3-42	50	22	100
YOH-WM-4.8X190	7.5	190	4.8	3-46	50	22	100
YOH-WM-4.8X200	8	200	4.8	3-50	50	22	100
YOH-WM-4.8X250	10	250	4.8	3-65	50	22	100
YOH-WM-4.8X280	11	280	4.8	3-70	50	22	100
YOH-WM-4.8X300	12	300	4.8	3-80	50	22	100
YOH-WM-4.8X350	14	350	4.8	3-90	50	22	100
YOH-WM-4.8X360	14.2	360	4.8	3-94	50	22	100
YOH-WM-4.8X370	14.6	370	4.8	3-98	50	22	100
YOH-WM-4.8X380	15	380	4.8	3-102	50	22	100
YOH-WM-4.8X400	16	400	4.8	3-105	50	22	100
YOH-WM-4.8X430	16.9	430	4.8	3-120	50	22	100
YOH-WM-4.8X450	17.7	450	4.8	3-130	50	22	100
YOH-WM-4.8X500	19.7	500	4.8	3-150	50	22	100

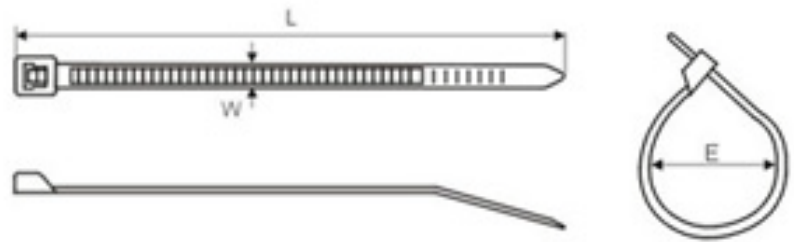


Self-locking nylon cable ties

Item No.	Length		Width mm	Bundie Dia(E) mm	Min Tensile Strength		Pack pcs/polybag
	inch	mm			lbs	kgs	
YOH-WM-7.2X150	6	150	7.2	3-35	120	55	100
YOH-WM-7.2X200	8	200	7.2	3-50	120	55	100
YOH-WM-7.2X250	10	250	7.2	4-65	120	55	100
YOH-WM-7.2X280	11	280	7.2	4-78	120	55	100
YOH-WM-7.2X300	12	300	7.2	4-80	120	55	100
YOH-WM-7.2X350	14	350	7.2	4-90	120	55	100
YOH-WM-7.2X370	14.6	370	7.2	4-98	120	55	100
YOH-WM-7.2X380	15	380	7.2	4-100	120	55	100
YOH-WM-7.2X400	16	400	7.2	4-105	120	55	100
YOH-WM-7.2X450	18	450	7.2	4-110	120	55	100
YOH-WM-7.2X500	20	500	7.2	4-150	120	55	100
YOH-WM-7.2X530	20.9	530	7.2	4-160	120	55	100
YOH-WM-7.2X550	21.6	550	7.2	4-165	120	55	100
YOH-WM-9X400	16	400	9	8-105	175	79.4	100
YOH-WM-9X450	18	450	9	8-118	175	79.4	100
YOH-WM-9X500	20	500	9	8-150	175	79.4	100
YOH-WM-9X550	21.6	550	9	8-160	175	79.4	100
YOH-WM-9X600	23.6	600	9	8-170	175	79.4	100
YOH-WM-9X650	25.6	650	9	8-185	175	79.4	100
YOH-WM-9X720	28.3	720	9	10-195	175	79.4	100
YOH-WM-9X800	31.5	800	9	10-230	175	79.4	100
YOH-WM-9X900	35.5	900	9	10-265	175	79.4	100
YOH-WM-9X1000	39.4	1000	9	10-300	175	79.4	100
YOH-WM-9X1100	43.3	1100	9	10-335	175	79.4	100
YOH-WM-9X1200	47.2	1200	9	12-370	175	79.4	100
YOH-WM-12X650	25.6	650	12	14-185	250	114	100
YOH-WM-12X900	35.5	900	12	14-265	250	114	100




Mountable head ties

- Material: Nylon 66 certificated by UL.
- Usage: after bundling wires, fix them on plate with screw

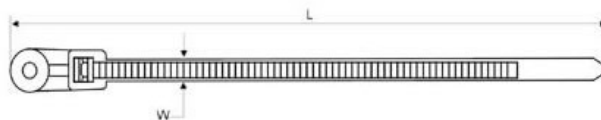

Item No.	Length		Width	Max Bundie Dia	Min Tensile Strength	
	inch	mm	mm	mm	lbs	kgs
YOH-WM-100MH	4"	100	2.5	22	18	8
YOH-WM-100MA	4"	100	3.6	22	40	18
YOH-WM-150MH	6"	150	3.6	32	40	18
YOH-WM-200MH	8"	200	4.8	42	50	22
YOH-WM-300MH	12"	300	4.8	80	50	22



Self-adhesive tie mounts



- Material: Nylon 66, 94V-2 ,certificated by UL, the back attached sponge glue imported .
- Usage: Peel the sponge glue and stick on the wall then, bundle the wire with cable ties.

ITEM.NO.	L(mm)	W(mm)	H	T
			MM	MM
YOH-WM-20	20	20	6.1	5
YOH-WM-25	25	25	7.5	6.2
YOH-WM-30	30	30	8.7	6.4
YOH-WM-40	40	40	6.4	10.8